

Part Number 23056 Light Module

Light Module 23056 can be installed to prevent the plow's parking lights from illuminating when the vehicle's brake is depressed.

Step 1: Connect the light module in-line with the plow light connectors. Each connector is marked as Driver Side and Passenger Side. Ensure the cables and connections are routed to prevent snagging. See Figure 2.

Step 2: Connect the RED terminal to the post of the motor solenoid. Once fastened, cover the terminal with the red rubber sleeve for protection from the elements. See Figure 3.

Step 3: Mount the light module to the lift frame. It is recommended to mount on the cross bar on the lower half of the lift frame with the light module facing the vehicle. This will prevent the light module from interfering with the hydraulic cover.



Figure 1 - 23056 Module

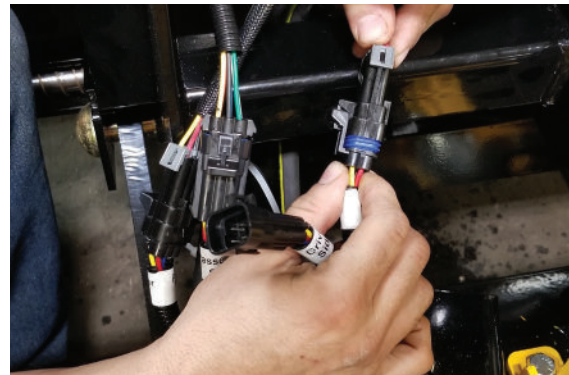


Figure 2 - Connect to Lights



Figure 3 - Red Wire to Positive Terminal
of Motor Solenoid



Figure 4 - Mount to Lift Frame

Meyer Products LLC reserves the right, under its continuing product improvement program, to change construction or design details, specifications and prices without notice or without incurring any obligation.